



# Демонтажная вставка


## PN 10 | PN 16 | PN 25



### Технические параметры

#### Давление PN 16

DN	MOP (PN)	L	L1	ØD	ØK	C	Болты		Вес
							Количество	Ø d2	
50	16	180	280	165	125	19	4	19	11
65		180	280	185	145	19	4	19	13
80		200	330	200	160	19	8	19	17
100		200	330	220	180	19	8	19	20
125		200	330	250	210	19	8	19	24
150		200	330	285	240	19	8	23	30
200		200	330	340	295	20	12	23	45
250		230	370	405	355	22	12	28	66
300		250	410	460	410	24,5	12	28	84
350		260	410	520	470	26,5	16	28	107
400		270	430	580	525	28	16	31	142
450		270	430	640	585	30	20	31	177
500		280	440	715	650	31,5	20	34	200
600		300	500	840	770	36	20	37	305
700		300	500	910	840	39,5	24	37	321
800		320	520	1025	950	43	24	41	469
900		320	520	1125	1050	46,5	28	41	535
1000		340	560	1255	1170	50	28	44	698
1100		340	560	1355	1270	53,5	32	44	830
1200		360	600	1485	1390	57	32	50	1070
1300		370	630	1585	1490	59	32	50	1172
1400		380	630	1685	1590	60	36	50	1270
1500		380	610	1820	1710	62,5	36	57	1560
1600		400	700	1930	1820	65	40	57	1705
1700		445	750	2030	1920	68	44	57	-
1800	450	750	2130	2020	70	44	57	-	
2000	460	775	2345	2230	75	48	62	-	
2200	470	775	2555	2440	80	52	62	-	
2500	470	775	2890	2750	76	60	60	-	

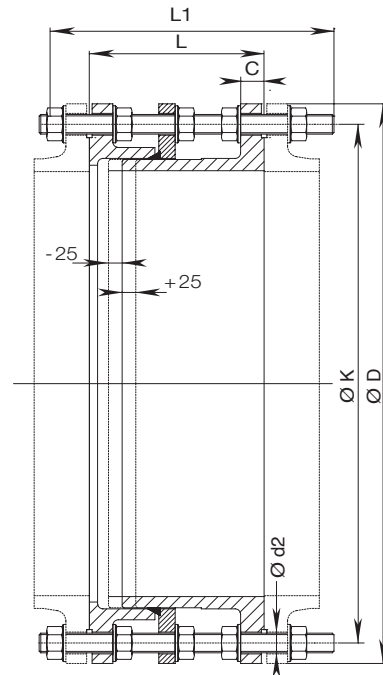

#### Давление PN 25

DN	MOP (PN)	L	L1	ØD	ØK	C	Болты		Вес
							Количество	Ø d2	
80	25	200	330	200	160	19	8	19	
100		220	340	235	190	19	8	23	32
125		220	370	270	220	19	8	28	43
150		230	370	300	250	20	8	28	52
200		230	370	360	310	22	12	28	76
250		250	410	425	370	24,5	12	31	108
300		250	410	485	430	27,5	16	31	129
350		270	480	555	490	30	16	34	196
400		280	500	620	550	32	16	37	212
450		280	480	670	600	34,5	20	37	281
500		300	500	730	660	36,5	20	37	290
600		320	520	845	770	42	20	41	389
700		340	530	960	875	46,5	24	44	505
800		360	600	1085	990	51	24	50	690
900		380	600	1185	1090	55,5	28	50	920
1000		400	650	1320	1210	60	28	57	1257
1200		450	750	1530	1420	69	32	57	1870
1400		490	830	1755	1540	74	36	62	-
1600		470	800	1975	1860	81	40	62	-
2000		540	950	2425	2300	95	48	70	-
2500	540	920	3015	3840	92	60	68	-	